


# Through-penetration Firestop Systems

## System No. W-J-2371

CAN / ULC S115

F Rating – 3 Hr
FT Rating – 3 Hr
FH Rating – 3 Hr
FTH Rating – 3 Hr

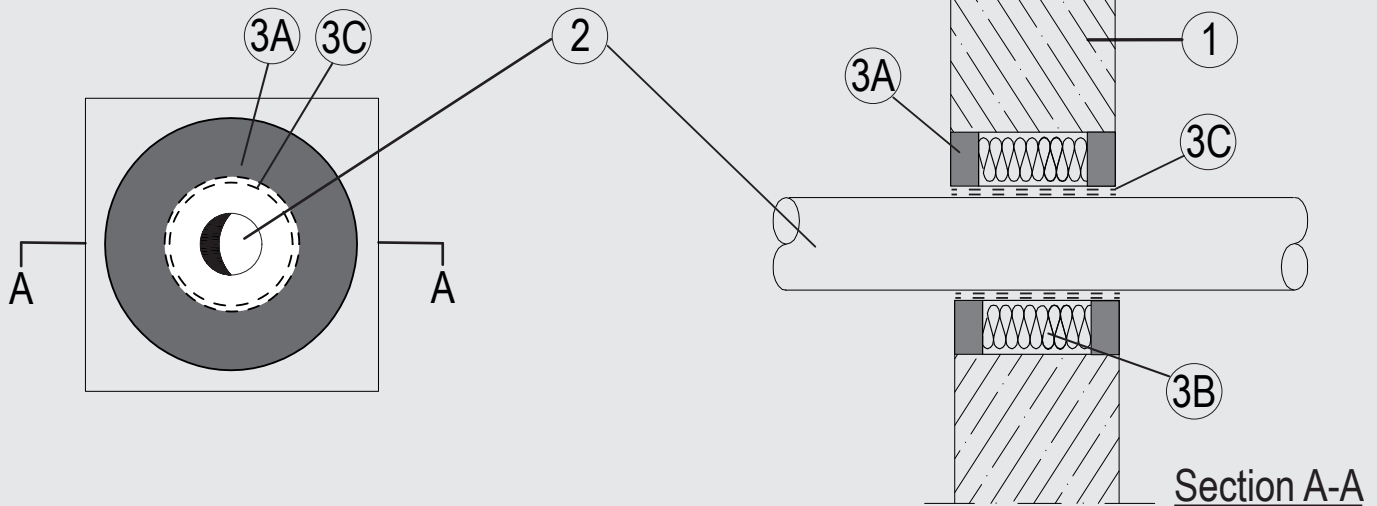

### 1. Wall Assembly

Min. 4-1/2 in. (115 mm) thick lightweight or normal weight (100-150 pcf or 1600 - 2400 kg/m<sup>3</sup>) concrete. Wall may also be constructed of any UL Classified Concrete Blocks\*. Opening shall be rectangular or circular with max dimensions of 7.9 in. (200 mm). See Concrete Blocks (CAZT) in the Fire Resistance Directory for names of manufacturers.

### 2. Pipes / Tubes

Single to be installed within the opening. The annular space between the pipes and the periphery of the opening to be 1 in (25 mm). Pipes to be rigidly supported on both sides of the wall assembly. The following penetrants may be used:

- A. Nom 5.9 in (150 mm) diam 0.37 in (9.5 mm) wall thickness PE pipe for use in closed (process or supply piping systems).

### 3. Firestop System

The Firestop System shall consist of the following:

- A. Packing Material — Gypsum mortar minimum 1 in. depth and min 1 in. (25 mm) width on both sides
- B. Packing Material — Min. 2-3/5 in. (65 mm) thickness of min. 4 pcf (64 kg/m<sup>3</sup>) mineral wool batt insulation or loose wool or optional gypsum mortar firmly packed into the opening as a permanent form. Packing material to be recessed from both surfaces of wall to accommodate the required thickness of fill material.
- C. Fill, Void or Cavity Material\* — Overall 2 intumescent wraps. Each wrap is made up of 1 length of 2 layer of 1/16 in (1.5 mm) by 2 in. (50 mm) wrap flush mounted with the outside of the wall on both sides around the pipe.  
svt BRANDSCHUTZ VERTRIEBSGESELLSCHAFT MBH INTERNATIONAL — PYRO-SAFE DG-CR BS

\*Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

Please contact us for further information:

Information: [global@svt.de](mailto:global@svt.de) Order: [order@svt.de](mailto:order@svt.de)  
+49 4105-40 90-0