


# PYRO-SAFE® joint sealing system FLAMMOPLAST

Fire resistance max. EI 120  
acc. EN 13501-2

Joint sealing system made of mineral-fibre board strips and intumescent coating

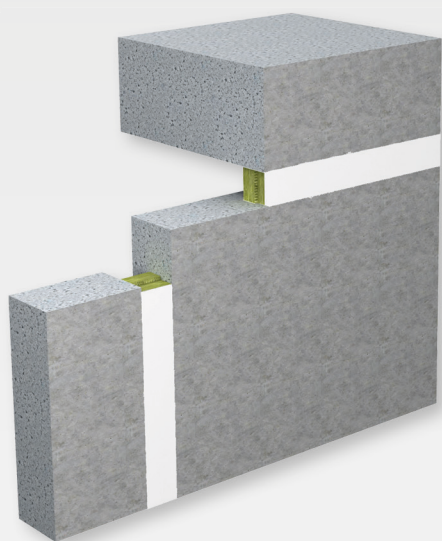

## System Data

<b>Certificate of usability</b>	ETA-13/0543	
<b>Thickness structural element</b>	Wall	≥ 180
	Floor	≥ 180
<b>Maximum Sealing size</b>	Wall	Joint width ≤ 100
	Floor	Joint width ≤ 100

Dimensions in mm

## General Information

### Field of application

- Horizontal and vertical joint between solid walls, between floors as well as between solid walls and floors

## Products



**PYRO-SAFE® FLAMMOPLAST KS 1**  
**Fire protection coating**  
12,5 kg pail – Item No. 01151001



**PYRO-SAFE® FLAMMOPLAST KS 3**  
**Filler**  
12,5 kg pail – Item No. 01152001



**Loose mineral wool**  
10 kg bag – Item No. 01183000



**Label**  
1 piece – Item No. 01229000