


# PYRO-SAFE® Flammoplast SP-A2 system for structural steel

Fire resistance max. R 30 / R 60  
acc. EN 13501-2

Water-based reactive fire protection system for extended  
preserve of the carrying capacity for structural steel

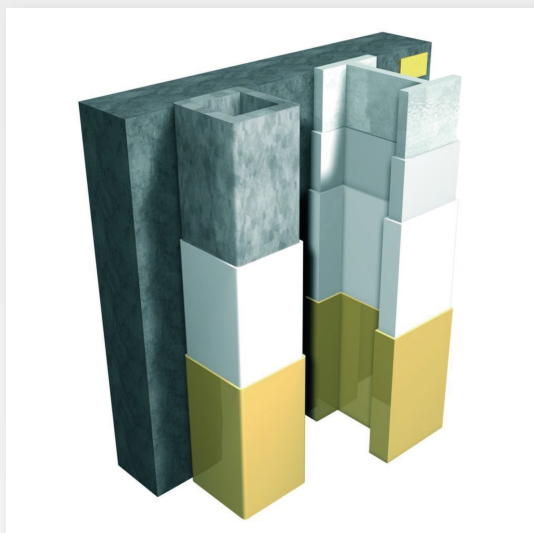

## System Data

Certificate of usability

ETA-17/0394

## General Information

### Field of application

- Indoor use
- Steel beams, supports and framework with open and hollow sections

### Products



**PYRO-SAFE® FLAMMOPLAST SP-A2**  
Fire protection coating  
12,5 kg pail – Item No. 01153300



**PYRO-SAFE® Dekorlack SP 2**  
Topcoat  
12,5 kg pail – Item No. 01153101



**Label**  
1 piece – Item No. 01229000