

# FLAMRO DSB-W

EI 120

ETA-16/0318



## Special Benefits


- Rapid and easy installation of seal only with FLAMRO DSB-W
- Cable bundle up to  $\varnothing = 45$  mm, single cable  $\leq 5 \times 1.5^2$  and  $\varnothing \leq 17$  mm
- In the case of lightweight partition walls, no cladding is required for the opening soffits, if mineral wool insulation is present
- Minimum joint width between cable and opening soffit 1 mm
- No cable coating required
- Area of application  $Y_2$  in accordance with EOTA TR 024.  
The seals must be protected from rain and UV.

## Description

FLAMRO DSB-W consists of an intumescent material that is used in structures for sealing remaining openings in small cable seals.

## Permitted Configuration

- Sheathed cables  $\leq 5 \times 1.5^2$  and  $\varnothing \leq 17$  mm
- Bundle of telecommunication cables  $\varnothing \leq 45$  mm

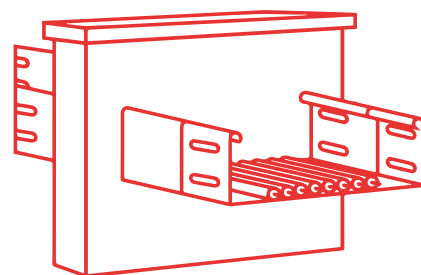

## Form of Delivery

Article Description	Contents / Dimensions	Art. No.
FLAMRO DSB-W	310 ml	31004

How much material is required?

