


FLAMRO® BHF Fire protection hood

Ready-to-install fire protection hood for covering recessed luminaires and loudspeakers.

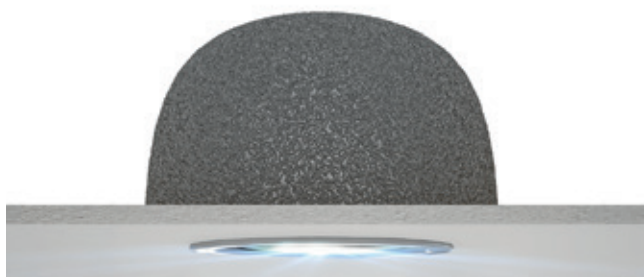

Allowed services

Media lines		max. diameter*
	Cable	≤ 12

*All specifications in mm

Fire resistance class

max. EI 30 acc. to EN 13501-2

Field of Application

- False floors in screwed or smoothed design

System data

Certificate of usability	ETA-17/0686	
Component thickness	Floor	≥ 18
Maximum sealing size	Floor	Floor cut-out max. 300

All specifications in mm

Products



FLAMRO® BSH Fire protection hood

BSH 100
ID=170 mm, OD=190 mm, H=150 mm
Art.-no. 32001

BSH 200
ID=240 mm, OD=260 mm, H=200 mm
Art.-no. 32002

BSH 300
ID=320 mm, OD=340 mm, H=200 mm
Art.-no. 32300

BSH 400
ID=420 mm, OD=440 mm, H=200 mm
Art.-no. 32400

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0