


## FLAMRO® BS-MK Combi seal

Combination penetration seal made of mineral fibre boards (1x 60 mm) with ablative fire protection coating.





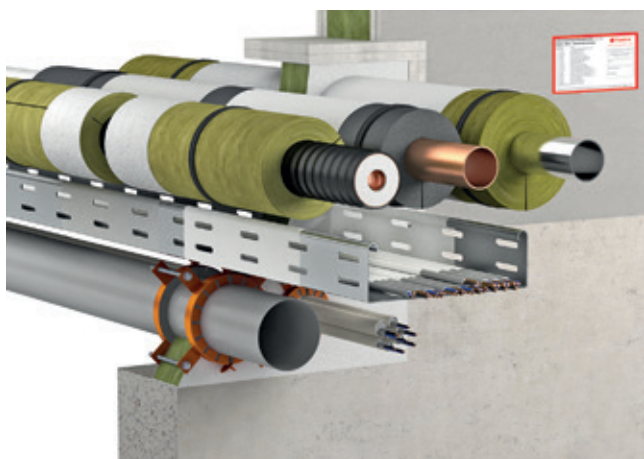






### Fire resistance class

max. EI 120 acc. to EN 13501-2

### Field of Application

- Plasterboard wall, solid wall, floor

### Allowed services

Media lines		max. diameter*
	Cable	≤ 80
	Cable bundle	≤ 100 / ≤ 21
	Cable support structures	✓
	Waveguide cable	≤ 50.4
	EIC Single	≤ 63 / ≤ 21
	EIC Bundle	≤ 125 / ≤ 63 / ≤ 21
	Combustible pipes	≤ 110
	Non-combustible pipes with mineral fibre insulation	≤ 108 (Steel) ≤ 88.9 (Copper)
	Non-combustible pipes with FEF insulation	≤ 88.9

### System data

<b>Certificate of usability</b>	ETA-15/0237	
<b>Thickness structural element</b>	Wall	≥ 100
	Floor	≥ 150
<b>Sealing thickness</b>	Wall	≥ 60
	Floor	≥ 60
<b>Maximum sealing size</b>	Wall	1000 x 600
	Floor	1000 x 600

All specifications in mm

\*All specifications in mm

Please contact us for further information:

✉ Information: [global@svt.de](mailto:global@svt.de)    Orders: [order@svt.de](mailto:order@svt.de)  
☎ +49 4105-40 90-0

## FLAMRO® BS-MK Combi seal

---


### Products



#### FLAMRO® BMA

##### Fire protection coating

Bucket of 5.0 kg - Art. no. 20500  
12,5 kg Pail - Art. no. 20125



#### FLAMRO® BS 60-2

##### Mineral fibre board pre-coated on both sides

1000 x 625 x 60 mm – Art. no. 50036



#### FLAMRO® UBB

##### Fire protection tape

Roll of 1000 x 60 x 2 mm - Art. no. 90050



#### FLAMRO® Variant N II A

##### Fire protection collar

32 mm - Art. no. 15032  
40 mm - Art. no. 15040  
50 mm - Art. no. 15050  
63 mm - Art. no. 15063  
75 mm - Art. no. 15075  
90 mm - Art. no. 15090  
110 mm - Art. no. 15110  
125 mm - Art. no. 15125  
140 mm - Art. no. 15140  
160 mm - Art. no. 15160



#### FLAMRO® BMS/BMK

##### Fire protection filler

Cartridge of 0.4 kg - Art. no. 30004  
Bucket of 5.0 kg - Art. no. 10500  
12,5 kg Pail - Art. no. 10125