




FLAMRO® DSB-W

Simple penetration sealing system made of intumescent filler for cables and cable bundles.

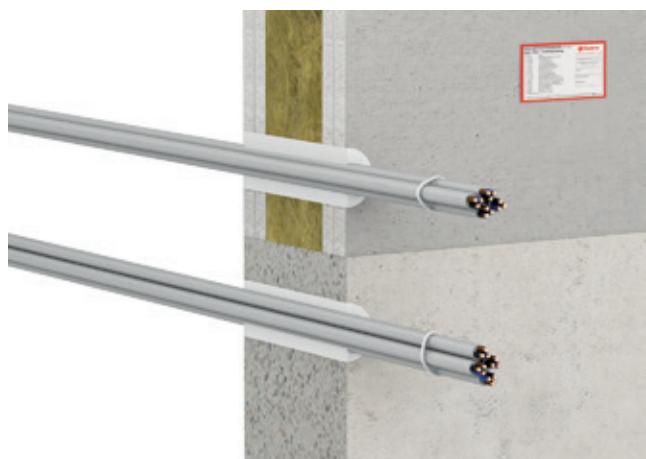

Allowed services

Media lines		max. diameter*
	Cable	≤ 17
	Cable bundle	≤ 45 / ≤ 17

*All specifications in mm

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

System data

Certificate of usability	ETA-16/0318	
Thickness structural element	Wall	≥ 100
	Floor	≥ 150
Sealing thickness	Wall	≥ 100
	Floor	≥ 150
Maximum sealing size	Wall	≤ 65
	Floor	≤ 65

All specifications in mm

Products



FLAMRO® DSB-W
Fire protection filler
 Cartridge 400 ml - Art. no. 31004

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
 ☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright FLAMRO®-Brandschutz-Systeme GmbH, Seevetal. FLAMRO® is a registered trademark © of FLAMRO® Brandschutz-Systeme GmbH, Seevetal.