


FLAMRO® KSL-W

Fire protection fabric for the penetration sealing of combustible pipelines.



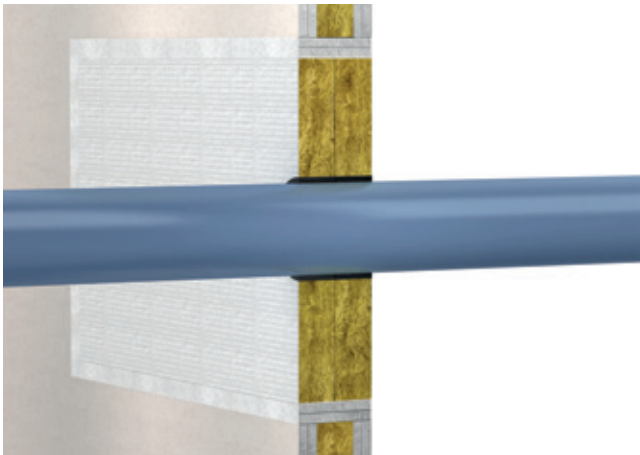

Fire resistance class

max. EI 180 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

Allowed services

Media lines	max. diameter*
 Combustible pipes <ul style="list-style-type: none"> • PVC-U, PE-HD, PP • Geberit Silent PP • Geberit Silent Pro • Kekelit Phon EX AS • Pipelife Master 3 • POLO-KAL NG 	≤ 160
	<ul style="list-style-type: none"> • Conel Drain • Geberit Silent dB 20 • Wavin SiTech+ • POLO-KAL XS • Rehau Raupiano Plus • Rehau Raupiano light • Silenta Premium
 Multilayer composite pipes <ul style="list-style-type: none"> • Geberit Mepla • Rehau Rautitan Stabil • Kekelit Kelox multilayer composite pipes 	≤ 75 ≤ 40 ≤ 75


*All specifications in mm

System data

Certificate of usability	ETA-18/0885	
Thickness structural element	Wall	≥ 100
	Floor	≥ 150
Sealing thickness	Wall	≥ 100
	Floor	≥ 150

All specifications in mm

Products



FLAMRO® KSL-W Fire protection fabric

Roll of 10 m x 50 mm self adhes. - Art. no. 15510

Roll of 20 m x 50 mm self adhes. - Art. no. 15520

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0