


FLAMRO® Multi Combi seal EN

Combination penetration seal made of mineral fibre boards (2x 60 mm) with ablative fire protection coating.

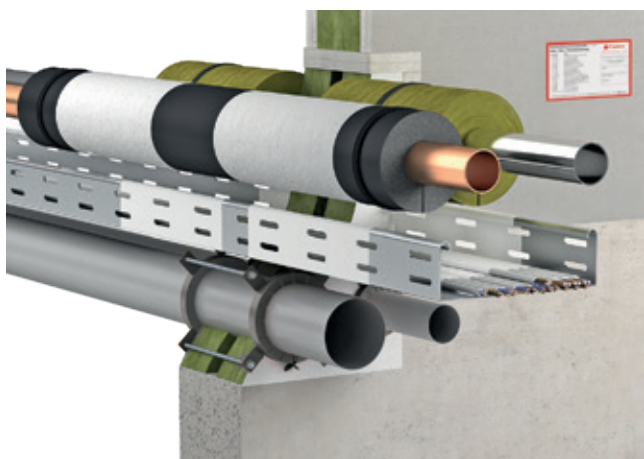

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application








- Plasterboard wall, solid wall, floor

System data

Certificate of usability	ETA-15/0237	
Thickness structural element	Wall	≥ 122
	Floor	≥ 150
Sealing thickness	Wall	≥ 130
	Floor	≥ 150 (2 boards + air gap)
Maximum sealing size	Wall	1200 x 970
	Floor	1200 x 970 or 538 x ∞

All specifications in mm

Allowed services

Media lines		max. diameter*
	Cable	≤ 80
	Cable bundle	≤ 100 / ≤ 21
	Cable support structures	✓
	EIC Single	≤ 16
	EIC Bundle	Max. 3 pcs. of ≤ 16
	Combustible pipes	≤ 160
	Non-combustible pipes with mineral fibre insulation	≤ 168.3 (Steel) ≤ 88.9 (Copper)

*All specifications in mm

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0

FLAMRO® Multi Combi seal EN

Products



FLAMRO® BMS/BMK
Fire protection filler

Cartridge of 0.4 kg - Art. no. 30004
Bucket of 5.0 kg - Art. no. 10500
12,5 kg Pail - Art. no. 10125



FLAMRO® BMA
Fire protection coating

Bucket of 5.0 kg - Art. no. 20500
12,5 kg Pail - Art. no. 20125



FLAMRO® BS 60-1
Mineral fibre board pre-coated on one side

1000 x 625 x 60 mm – Art. no. 50060



FLAMRO® Variant N II A
Fire protection collar

32 mm - Art. no. 15032
40 mm - Art. no. 15040
50 mm - Art. no. 15050
63 mm - Art. no. 15063
75 mm - Art. no. 15075
90 mm - Art. no. 15090
110 mm - Art. no. 15110
125 mm - Art. no. 15125
140 mm - Art. no. 15140
160 mm - Art. no. 15160



FLAMRO® UBB
Fire protection tape

Roll of 1000 x 60 x 2 mm - Art. no. 90050
