


FLAMRO® Variant N-B

Simple fire protection collar for the penetration sealing of combustible pipes up to medium diameters.

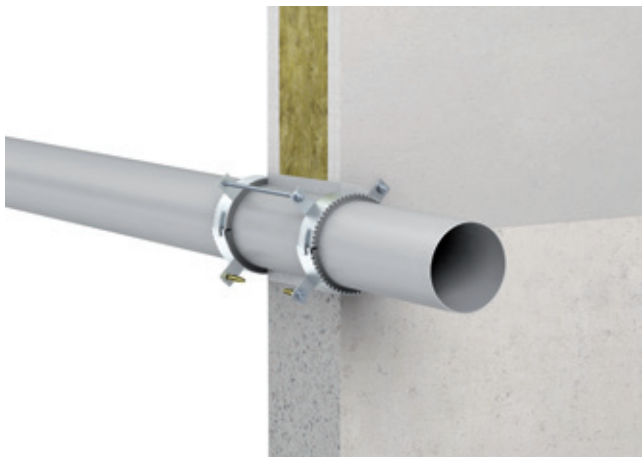

Fire resistance class

max. EI 240 U/C acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

System data

Certificate of usability		ETA-15/0677
Thickness structural element	Wall	≥ 100
	Floor	≥ 150


All specifications in mm

Allowed services

Media lines	max. diameter*
Combustible pipes <ul style="list-style-type: none"> • PVC-U • PE • PP • Coes Blue Power • Wavin SiTECH • Aquatherm green pipe MS • Geberit Silent PP • POLO-KAL NG • Rehau Raupiano Plus 	≤ 160
• Triplus 3 layer sound insulation pipe <ul style="list-style-type: none"> • Uponor MLC 	≤ 90 ≤ 110

*All specifications in mm

Products



FLAMRO® Variant N-B Fire protection collar

- 50 mm - Art. no. 19050
- 63 mm - Art. no. 19063
- 75 mm - Art. no. 19075
- 90 mm - Art. no. 19090
- 110 mm - Art. no. 19110
- 125 mm - Art. no. 19125
- 140 mm - Art. no. 19140
- 160 mm - Art. no. 19160

Please contact us for further information:

- ✉ Information: global@svt.de Orders: order@svt.de
- ☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright FLAMRO®-Brandschutz-Systeme GmbH, Seevetal. FLAMRO® is a registered trademark © of FLAMRO® Brandschutz-Systeme GmbH, Seevetal.