



FLAMRO® Variant N II A

Fire protection collar for the sealing of combustible pipelines.

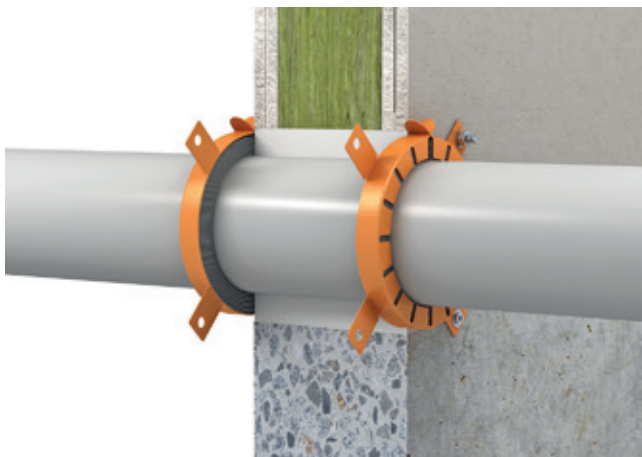

Allowed services

Media lines	max. diameter*	
 Combustible pipes	<ul style="list-style-type: none"> • PVC • PE-HD 	≤ 400
	<ul style="list-style-type: none"> • PP • Coolfit 	≤ 315

*All specifications in mm

Fire resistance class

max. EI 120 U/U, EI 240 U/C acc. to. EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

System data

Certificate of usability	ETA-13/0922	
Thickness structural element	Wall	≥ 100
	Floor	≥ 150
Sealing thickness	Wall	≥ 100
	Floor	≥ 150

All specifications in mm



Products



FLAMRO® Variant N II A Fire protection collar

32 mm	- Art. no. 15032
40 mm	- Art. no. 15040
50 mm	- Art. no. 15050
63 mm	- Art. no. 15063
75 mm	- Art. no. 15075
90 mm	- Art. no. 15090
110 mm	- Art. no. 15110
125 mm	- Art. no. 15125
140 mm	- Art. no. 15140
160 mm	- Art. no. 15160
180 mm	- Art. no. 15180
200 mm	- Art. no. 15200
225 mm	- Art. no. 15225
250 mm	- Art. no. 15250
280 mm	- Art. no. 15280
300 mm	- Art. no. 15300
315 mm	- Art. no. 15315
355 mm	- Art. no. 15355
400 mm	- Art. no. 15400

Please contact us for further information:

 Information: global@svt.de Orders: order@svt.de
 +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright FLAMRO®-Brandschutz-Systeme GmbH, Seevetal. FLAMRO® is a registered trademark © of FLAMRO® Brandschutz-Systeme GmbH, Seevetal.