


FLAMRO® Variant N III Wrap

Penetration sealing of combustible insulated and non-insulated plastic pipes and multi-layer composite pipes with intumescent fire protection tape.

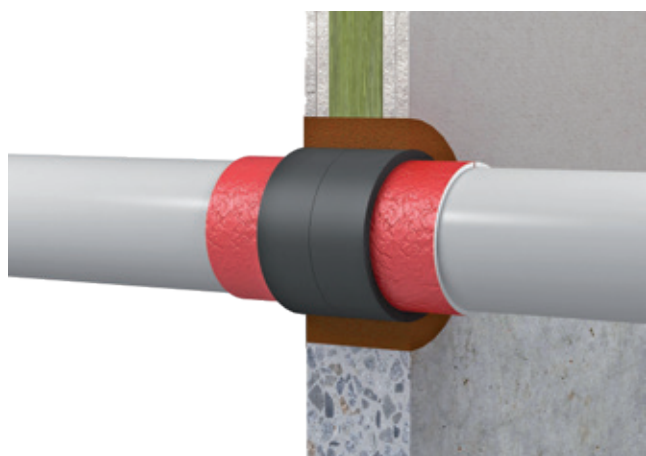

Allowed services

Media lines	max. diameter*
Combustible pipes	
• PVC-U	≤ 160
• PE-HD	≤ 110
• PP	
• Wavin SiTECH	
• POLO-KAL NG	
• Geberit Silent PP	
• Rehau Raupiano plus	
• aquatherm green pipe	
• Uponor MLC	
• Alpex F50 PROFI	≤ 32
• Alpex L	≤ 75

*All specifications in mm

Fire resistance class

max. EI 240 U/C, EI 120 U/U acc. to EN 13501-2

Field of Application


- Plasterboard wall, solid wall, floor

System data

Certificate of usability	ETA-16/0056	
Thickness structural element	Wall	≥ 100
	Floor	≥ 150

All specifications in mm

Products



FLAMRO® Variant N III Wrap

Fire protection fabric

Roll of 12.5 m x 50 mm x 2 mm - Art. no. 15512

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0