




PYRO-SAFE® CT

Easy-to-build penetration sealing system with snap-on lock comprising of two half shells with inner lining of fire protection fabric.

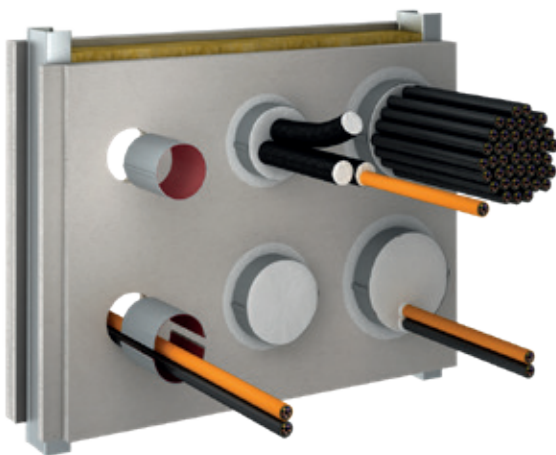

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

System data

Certificate of usability	ETA-16/0016	
Thickness structural element	Wall	≥ 100
	Floor	≥ 125
Sealing thickness	Wall	≥ 150
	Floor	≥ 150
Maximum sealing size	Wall	1200 x 2000
	Floor	640 x ∞

All specifications in mm

Allowed services

Media lines		max. diameter*
	Cable	≤ 80
	Cable bundle	≤ 107 / ≤ 21
	EIC Single	≤ 63 / ≤ 21
	EIC Bundle	≤ 107 / ≤ 32 / ≤ 21
	PE lines "speed pipes"	24x ≤ 7.0 7x ≤ 10.0 5x ≤ 12.0
	Combustible pipes	≤ 32
	HVAC split-line-combinations	

*All specifications in mm


Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0



PYRO-SAFE® CT

Products



PYRO-SAFE® CT Cable Tube

- Ø 60 / Length 150 mm - Art. no. 01276100
- Ø 90 / Length 150 mm - Art. no. 012769100
- Ø 90 / Length 200 mm - Art. no. 012769200
- Ø 90 / Length 300 mm - Art. no. 012769300
- Ø 116 / Length 150 mm - Art. no. 01281150
- Ø 116 / Length 200 mm - Art. no. 01281200
- Ø 116 / Length 300 mm - Art. no. 01271300



PYRO-SAFE® NOVASIT K2

- Fire protection mortar**
- 25 kg Bag - Art. no. 01163030



PYRO-SAFE® FLAMMOTECT-A

- Fire protection coating Filler**
- 12,5 kg Pail - Art. no. 01155104
- 15 kg Pail - Art. no. 01155109
- 310 ml cartridge - Art. no. 01155125



PYRO-SAFE® GFM

- Fire protection mortar**
- 25 kg Bag - Art. no. 01167030



Mineral wool

- Bag of 10 kg - Art. no. 01183000

Cable Tubes group arrangement

