




PYRO-SAFE® DG-SC

Simple penetration sealing system with intumescent filler.

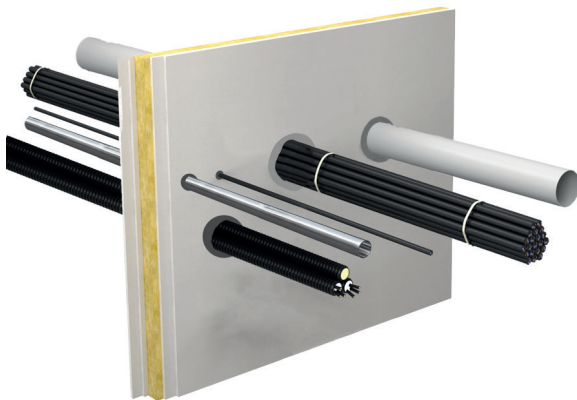

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, solid floor

System data

Certificate of usability	ETA-19/0704	
Thickness structural element	Wall	≥ 100
	Floor	≥ 150
Maximum Maximum sealing size	Wall	Depends on medium, type of gland and closure material
	Floor	Depends on medium, type of gland and closure material

All specifications in mm

Allowed services

Media lines		max. diameter*
	Cable	≤ 21
	Cable bundle	≤ 180 / ≤ 21
	EIC Single	≤ 32 / ≤ 21
	EIC Bundle	≤ 90 / ≤ 32 / ≤ 21
	Combustible pipes	
	<ul style="list-style-type: none"> • PVC-U, PE-100, PP-H • Geberit Silent Pro • Geberit Silent PP • Geberit Silent db 20 • Raupiano plus • Wavin SiTech+ • POLO-KAL NG • POLO-KAL XS • POLO-KAL 3S • Skolan db • valsir TRIPLUS • PipeLife MASTER 3 • FRIATEC FRIAPHON 	
	Non-combustible pipes	
	Copper	≤ 22.0
	Steel	≤ 48.3

*All specifications in mm

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0



PYRO-SAFE® DG-SC

Products





PYRO-SAFE® DG-SC
Cartridge 310ml – Art. no. 01157100



Mineral wool
Bag of 10 kg - Art. no. 01183000

Design variants

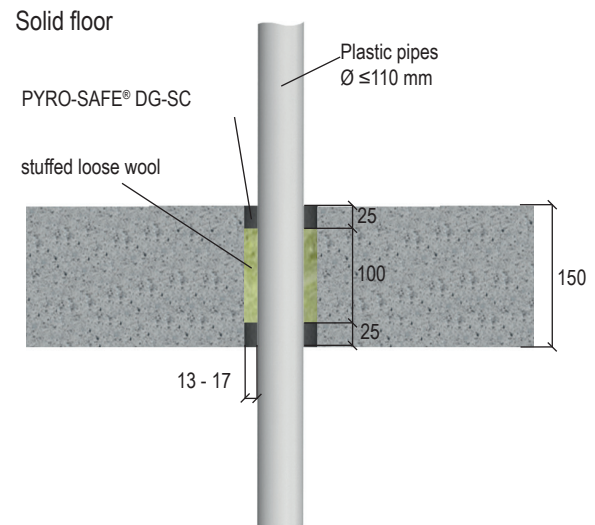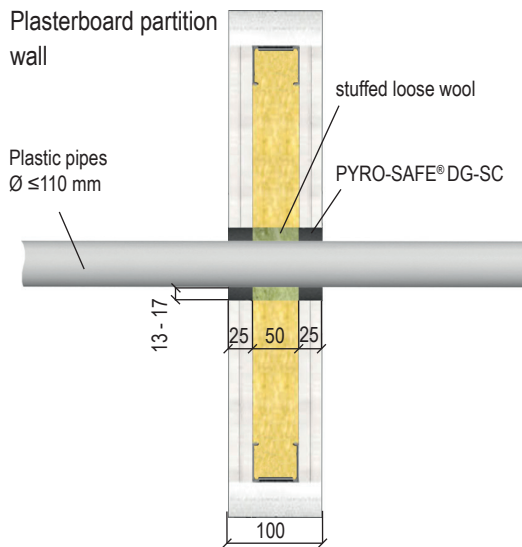

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (12.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. PYRO-SAFE® is a registered trademark © of the svt group, Seevetal.