




## PYRO-SAFE® Flammoplast SP-A2 Steel protection

Reactive fire protection coating system for increasing the fire resistance duration of steel components.

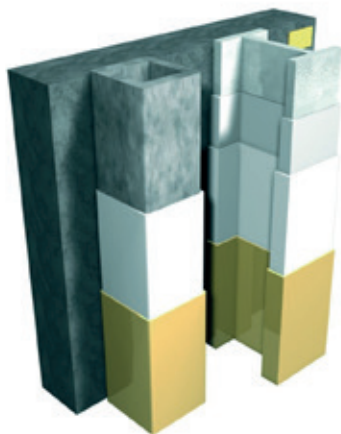

### Fire resistance class

max. R 60 acc. to EN 13501-2

### Field of Application

- For indoor use on steel components
- Supports and compression members with open profiles
- Compression members with closed profiles (circular)
- Compression members with closed profiles (rectangular, square)
- Supports with closed profiles (rectangular, square)

### System data

Certificate of usability	ETA-17/0394
U/A factor	≤ 404 m <sup>-1</sup>

\*All specifications in mm

### Products



#### PYRO-SAFE® FLAMMOPLAST SP-A2

Fire protection coating

12,5 kg Pail - Art. no. 01153300



#### PYRO-SAFE® Decorative paint SP 2

Decorative paint

12,5 kg Pail - Art. no. 01153101

#### Please contact us for further information:

✉ Information: [global@svt.de](mailto:global@svt.de) Orders: [order@svt.de](mailto:order@svt.de)  
☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. PYRO-SAFE® is a registered trademark © of the svt group, Seevetal.