




PYRO-SAFE® Joint sealing system FLAMMOPLAST

Joint sealing system of mineral fibre boards with intumescent coating.

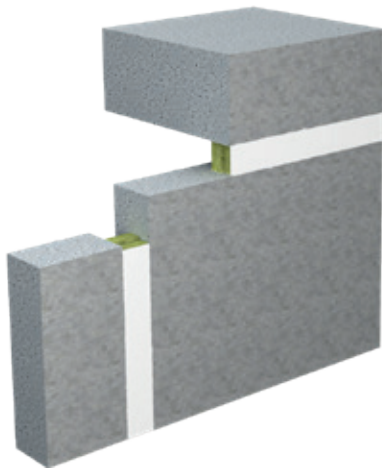

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application

- Joints between solid walls, between floors and between walls and floors

System data

Certificate of usability		ETA-13/0543
Thickness structural element	Wall	≥ 180
	Floor	≥ 180
Maximum sealing size	Wall	Joint width ≤ 100
	Floor	Joint width ≤ 100

All specifications in mm

Products



PYRO-SAFE® FLAMMOPLAST KS 1

Fire protection coating

12,5 kg Pail - Art. no. 01151001



PYRO-SAFE® FLAMMOPLAST KS 3

Fire protection coating

12,5 kg Pail - Art. no. 01152001



Mineral wool

Bag of 10 kg - Art. no. 01183000

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. PYRO-SAFE® is a registered trademark © of the svt group, Seevetal.