






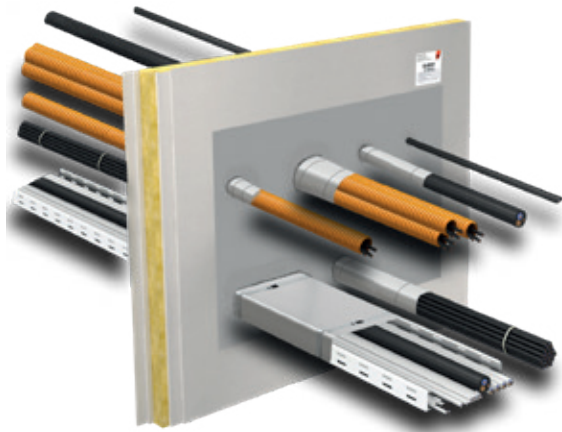


## PYRO-SAFE® Novasit BM for PBW

Cable penetration seal made of fire protection compound for installation in plasterboard walls.



### Allowed services

Media lines		max. diameter*
	Cable	≤ 80
	Cable bundle	≤ 150 / ≤ 21
	Cable support structures	✓
	EIC Single	≤ 32 / ≤ 21
	EIC Bundle	≤ 100 / ≤ 32 / ≤ 21

\*All specifications in mm

### Fire resistance class

max. EI 120 acc. to EN 13501-2

### Field of Application

- Plasterboard wall

### System data

Certificate of usability	ETA-16/0132	
Component thickness	Wall	≥ 100
Sealing thickness	Wall	≥ 100
Maximum sealing size	Wall	550 x 600

All specifications in mm

### Products



**PYRO-SAFE® NOVASIT BM**  
**Fire protection compound**  
 Bag of 20 kg - Art. no. 01161030



**PYRO-SAFE® DG-CR 1.5**  
**Fire protection wrap**  
 Roll of 10 m x 125 mm - Art. no. 01261125

Please contact us for further information:

✉ Information: [global@svt.de](mailto:global@svt.de)    Orders: [order@svt.de](mailto:order@svt.de)  
 ☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. PYRO-SAFE® is a registered trademark © of the svt group, Seevetal.