






ROKU® System AWM II KS

Fire protection collar as penetration seal for individual or bundled electrical installation pipes.

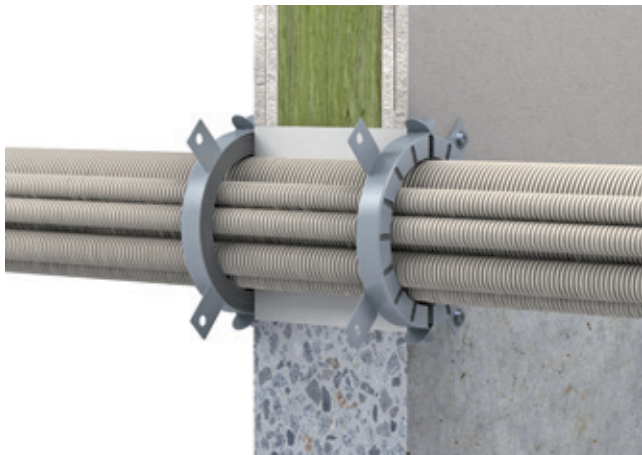

Allowed services

Media lines			max. diameter*
	EIC	Single	≤ 63 / ≤ 21
	EIC	Bundle	≤ 125 / ≤ 63 / ≤ 21

*All specifications in mm

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application


- Plasterboard wall, solid wall, floor

System data

Certificate of usability	ETA-11/0372	
Thickness structural element	Wall	≥ 100
	Floor	≥ 150

All specifications in mm

Products



ROKU® AWM II Fire protection collar

- 32 mm - Art. no. 0705000320
- 40 mm - Art. no. 0705000400
- 50 mm - Art. no. 0705000500
- 63 mm - Art. no. 0705000630
- 75 mm - Art. no. 0705000750
- 90 mm - Art. no. 0705000900
- 110 mm - Art. no. 0705001100
- 125 mm - Art. no. 0705001250



PYRO-SAFE® GFM Fire protection mortar

25 kg Bag - Art. no. 01167030



ROKU® AC Fire protection kit

Cartridge 310 ml - Art. no. 01149002

Please contact us for further information:

- ✉ Information: global@svt.de Orders: order@svt.de
- ☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. ROKU® is a registered trademark of the svt group, Seevetal.