





ROKU® System AWM II

Fire protection collar for the sealing of combustible pipelines.

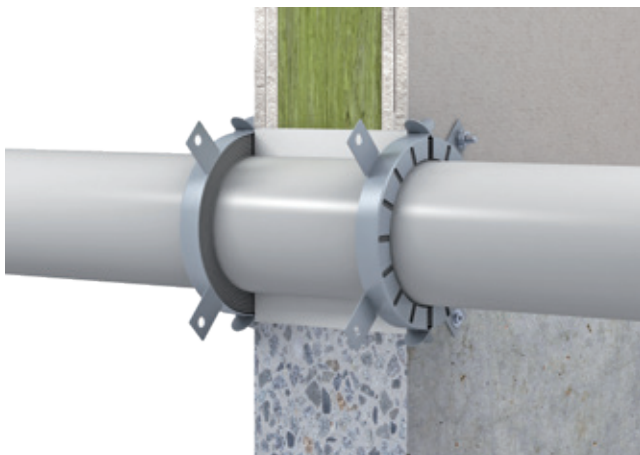

Allowed services

Media lines	max. diameter*	
	Combustible pipes	
	• PVC	≤ 400
	• PE-HD	
	• PP	
	• Coolfit	≤ 315

*All specifications in mm

Fire resistance class

max. EI 240 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

Products



ROKU® AWM II Fire protection collar

- 32 mm - Art. no. 0705000320
- 40 mm - Art. no. 0705000400
- 50 mm - Art. no. 0705000500
- 63 mm - Art. no. 0705000630
- 75 mm - Art. no. 0705000750
- 90 mm - Art. no. 0705000900
- 110 mm - Art. no. 0705001100
- 125 mm - Art. no. 0705001250
- 140 mm - Art. no. 0705001400
- 160 mm - Art. no. 0705001600
- 180 mm - Art. no. 0705001800
- 200 mm - Art. no. 0705002000
- 225 mm - Art. no. 0705002250
- 250 mm - Art. no. 0705002500
- 280 mm - Art. no. 0705002800
- 300 mm - Art. no. 0705003000
- 315 mm - Art. no. 0705003150
- 355 mm - Art. no. 0705003550
- 400 mm - Art. no. 0705004000

System data

Certificate of usability		ETA-11/0208
Thickness structural element	Wall	≥ 100
	Floor	≥ 150

All specifications in mm

Please contact us for further information:

- ✉ Information: global@svt.de Orders: order@svt.de
- ☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. ROKU® is a registered trademark of the svt group, Seevetal.