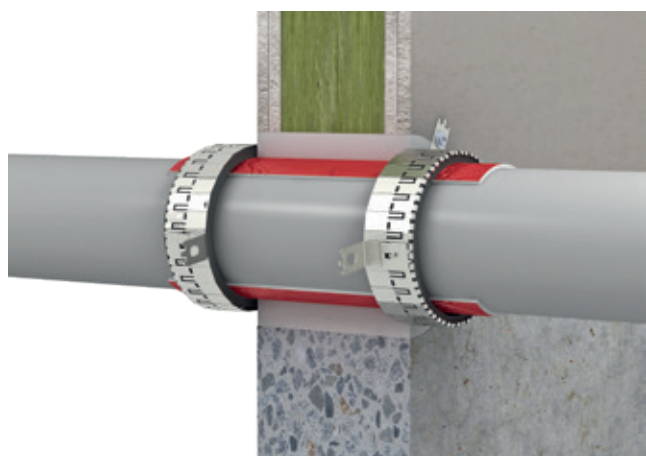




ROKU® System EC Endless

Endless collar with flexible design options for sealing combustible and non-combustible pipes.





Fire resistance class

max. EI 240 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

Allowed services

Media lines	max. diameter*	
 Combustible pipes <ul style="list-style-type: none"> • PVC • PE-HD • PP • Geberit Silent PP • POLO-KAL NG • Valsir Triplus 	≤ 160	
	<ul style="list-style-type: none"> • COES BluePower • Uponor Unipipe • Wavin SiTech • Fusiotherm Stabi • Rehau Raupiano Plus 	≤ 110
	<ul style="list-style-type: none"> • alpex F50 PROFI / alpex L 	≤ 75
 Non-combustible pipes with FEF insulation	≤ 108.0	



System data

Certificate of usability		ETA-13/0640
Thickness structural element	Wall	≥ 94
	Floor	≥ 150

All specifications in mm

*All specifications in mm

Please contact us for further information:

 Information: global@svt.de
  Orders: order@svt.de
 +49 4105-40 90-0



ROKU® System EC Endless

Products



ROKU® EC Endless

Endless collar







Dispenser box:

10 m ROKU® Strip (EM) Fire protection tape,
3 m stainless steel tape, 18 fastening hooks,
6 identification plates, 1 assembly instruction

U/C: Art. no. 0318209010

U/U: Art. no. 0303209011

Design variants

	Straight pipe gland		Attachment to 2x 45° bends (only with U/U version)
	Inclined pipe gland		Attachment to sleeves
	Multiple gland		Corner solution with 2/3 wrapping (only with U/U version)