





## ROKU® System IWM III Plus

Penetration sealing of combustible insulated and non-insulated plastic pipes and multi-layer composite pipes with intumescent fire protection tape.

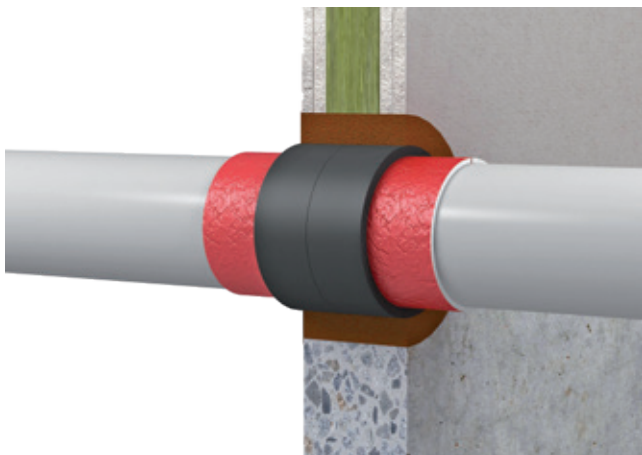

### Allowed services

Media lines		max. diameter*
	Combustible pipes	≤ 200

\*All specifications in mm

### Fire resistance class

max. EI 240 U/C, EI 120 U/U acc. to EN 13501-2

### Field of Application


- Plasterboard wall, solid wall, floor

### System data

Certificate of usability		ETA-15/0869
Thickness structural element	Wall	≥ 100
	Floor	≥ 150

All specifications in mm

### Products



#### ROKU® IWM III Plus Fire protection fabric

Roll of 12.5 m x 50 mm x 2 mm -  
Art. no. 01145000

Roll of 12.5 m x 50 mm x 2 mm self adhes. -  
Art. no. 01145100

**Please contact us for further information:**

✉ Information: [global@svt.de](mailto:global@svt.de) Orders: [order@svt.de](mailto:order@svt.de)  
☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. ROKU® is a registered trademark of the svt group, Seevetal.