



Protect your values.

PYRO-SAFE® DG-CR BS


Bandages

Description

Flexible glass filament fabric composite building material with insulation layer forming coating on both sides.

Application areas

- Fire protection wrap for the penetration sealing of combustible pipelines.

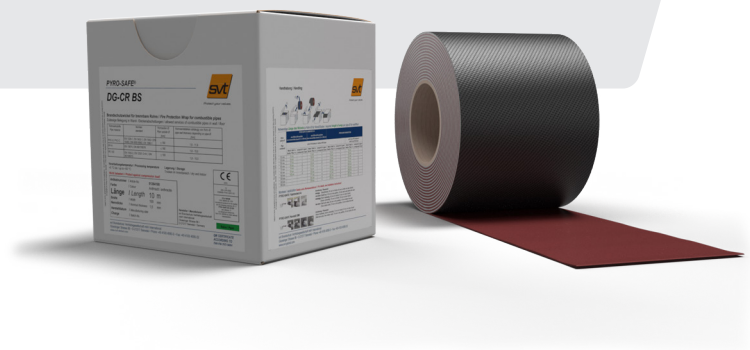

Delivery and packing

PYRO-SAFE® DG-CR BS	
Packing	Cardboard box
Width	100 mm
Length	10 m
Item number	
	01264100

Please contact us for further information:

✉ global@svt.de

Orders: order@svt.de

☎ +49 4105-40 90-0



Protect your values.




PYRO-SAFE® DG-CR BS

Technical data

Coating	Anthracite/red
Nominal thickness	1.5 mm
Weight per unit area	1,580 – 1,950 g/m ²
Application temperature	+ 5 °C – + 50 °C (< + 5 °C reduction of flexibility)
Application instructions	Apply with standard cutting tools such as scissors or cutter knife.
Storage	Dry indoors.
Safety information	Please note our safety data sheet.
Declaration of performance (DOP) no.	01260000-PYRO-SAFE®-DG

Applications

Penetration seal

	Certification	System name	Fire resistance class
	ETA-16/0268	PYRO-SAFE® Novasit BM	max. EI 120 acc. to EN 13501-2
		PYRO-SAFE® Flammotect single-layer	max. EI 90 acc. to EN 13501-2
		PYRO-SAFE® Flammotect double-layer	max. EI 120 acc. to EN 13501-2
	Z-19.15-1286	PYRO-SAFE® Novasit COMBI 90	Fire-resistant (90 min.)
	Z-19.53-2329	PYRO-SAFE Flammotect COMBI 90	
	Z-19.15-1276	PYRO-SAFE® Universal penetration seal COMBI 90	
	C-AJ-2813, C-AJ-2832, F-A-2279, F-A-2282, F-A-2294, F-A-2295, F-A-2326, F-A-2334, F-A-2335, F-A-2336, F-A-2337, F-A-2338, F-A-2339, F-A-2340, F-A-2341, F-A-3076, W-J-2326, W-J-2328, W-J-2347, W-J-8079, W-L-2684, W-L-2685, W-L-2686, W-L-2750, W-L-2758, W-L-2759, W-L-2760, W-L-2761, W-L-2765, W-L-8111, W-L-8114	PYRO-SAFE DG-CR BS	FT-Rating max. 3 hrs.