



PYRO-SAFE® B B 3100


Fire Protection Board

Description

PYRO-SAFE® B B 3100 is a special insulating panel made of natural aluminium and calcium silicates. The material used is fibre-free and harmless to health. The panel offers highest heat resistance up to 1100°C.

Application Areas

- Module & system level
- Storage & transport
- On request

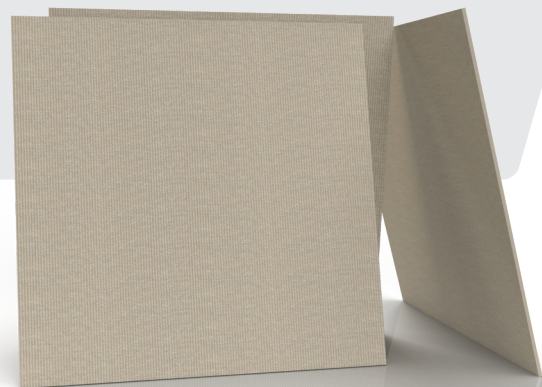

Delivery and Packaging

PYRO-SAFE® B B 3100	
Dimensions	1000 x 1000 mm ± 10 %
Thicknesses	1.0 mm to 6.0 mm; 8.0 mm; 10.0 mm or multilayer ±0.4 mm Special formats, cut-to-size or shaped parts are available on request
Article Number	on request

Please contact us for further information:

☎ +49 4105-40 90-14

✉ industry@svt.de



PYRO-SAFE® B B 3100

Technical Data

Colour	Brown
Composition	Insulating panel made of aluminium and calcium silicates, consolidated by organic binders
Material structure	Solid panel material
Bulk density	960 kg/m ³ (±10 %)
Moisture content	< 3 mass %
Thermal conductivity	0.120 W/mK
Storage	Stack max. 3 pallets on top of each other.
Safety information	Further information can be found in the safety data sheet.