

## Technical Data Sheet

# Pyroguard Marine B15


## Fire rated glass

### Description

PYROGUARD® Marine B15 is a toughened and gel-filled fire safety glass providing integrity only and integrity and insulation protection against the passage of flames, smoke and toxic gases from 30 to 60 minutes. The solutions provide 1B1 or 1C1 impact classification, high-performance acoustic properties and UV stability.

### Application areas

- Ships & offshore

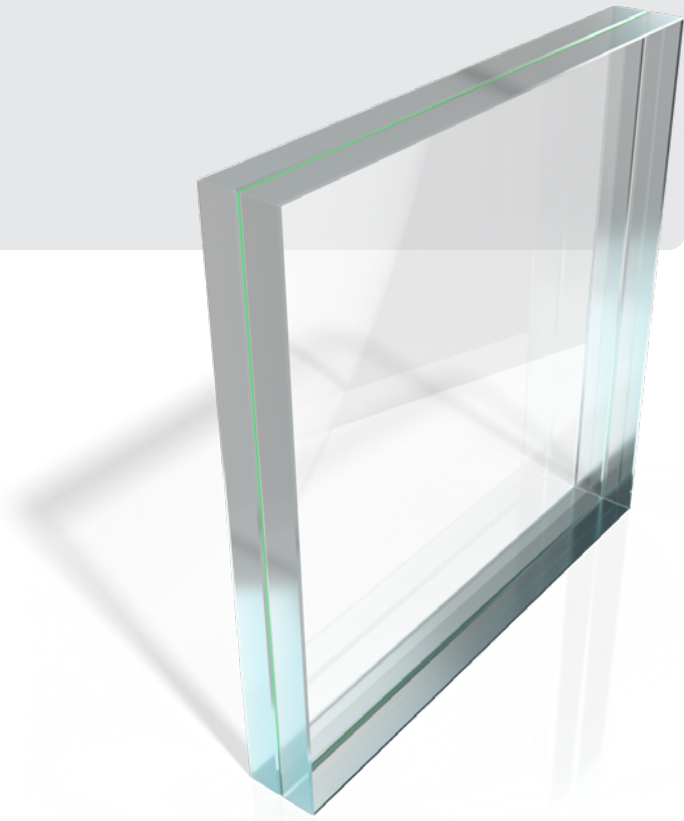

### Delivery and Packaging

<b>Pyroguard Marine A60</b>	
Dimensions [mm]	300 × 400 – 2040 × 3600
Thickness [mm]	13

Please contact us for further information:  
 +49 4105-40 90-14       [transportation@svt.de](mailto:transportation@svt.de)

## Technical Data Sheet

### Pyroguard Marine B15

Thickness tolerance	-2 / +3 mm
Fire resistance	A0, A15, B0, B15
Weight (at a thickness of 13 mm)	29.5 kg/m <sup>2</sup>
Sound reduction	37 dB (-1, -2)
Impact resistance	1B1
Light transmission	88 %
Ug value	5,1 W/(m <sup>2</sup> ·K)
Temperature range	100 °C and -10 / +45 °C