

## SAERTEX LEO® COATED FABRIC

### Fire Protection for Composite Materials

in co-operation with




### Description

SAERTEX LEO® COATED FABRIC is a glass fiber fabric with an integrated intumescent fire protection coating, which forms an insulating layer in the event of a fire. This combination of lightweight construction with integrated fire protection can be incorporated into any construction of a monolithic or sandwich composite structure in order to meet the highest fire protection requirements.

### Application Areas

- Rolling stock
- General industrial applications
- Battery safety

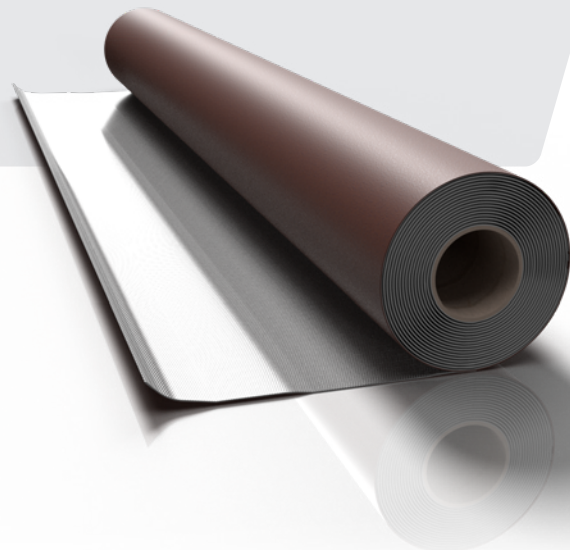

### Delivery and Packaging

SAERTEX LEO® COATED FABRIC	
Thickness	0,8 mm–1,2 mm
Length	50 lfm
Width	1270 mm
Article Number	
	on request

Please contact us for further information:

 +49 4105-40 90-14

 [transportation@svt.de](mailto:transportation@svt.de)

## SAERTEX LEO® COATED FABRIC

### Technical Data

in co-operation with



Article description (example)	Q-E-1933g/m2-1270mm LEO Coated		
Article construction (in accordance with EN 13473-1)	layer	construction	weight per unit area
	5	0°	319 g/m²
	4	45°	300 g/m²
	3	90°	307 g/m²
	2	-45°	300 g/m²
	1	LEO Coating	700 g/m²
	several standards available, more on request		
Resin systems	multicompatible with most standard EP resin systems, other on request		
Width (nominal)	1270 mm		
Processing	designed for use in closed molded applications (infusion, RTM, press molding etc.)		
Total tolerance	approx. 7.4 %		
Total area weight	1221–1933 g/m² depending on variant		
Start of reaction	approx. 150 °C		
Thermal conductivity	(infused plate) 0.588 W/(m·K)		
Approvals	on request		

Labelling (standard)	Every roll is equipped with a label in the core. A further label is located outside on the foil or on the box.
Packaging (standard)	Every roll is wound on a cardboard core and wrapped in foil. Further packaging options can be determined individually.
Storage recommendation	Protect from moisture and direct sunlight. To avoid problems with humidity and electrostatic charge, fabrics must be conditioned 24 hours prior to processing, independent of storage conditions.
Safety information	Consult the safety data sheet for further information.

SAERTEX® GmbH & Co. KG has been certified in accordance with ISO 9001:2015 and has been awarded the 2018 Eco-Profit Award.  
The SAERTEX® GmbH & Co. KG has its own DNV GL certified laboratory.