

# System Cable Tube ML


## Cable tubes / boxes

### Description

Consists of a half shell with an inner lining of fire protection fabric, which is extended and can be placed under the services.

### Areas of Application

- designed for use in raised floors
- installation in sealing systems made of mortar or mineral fibre boards

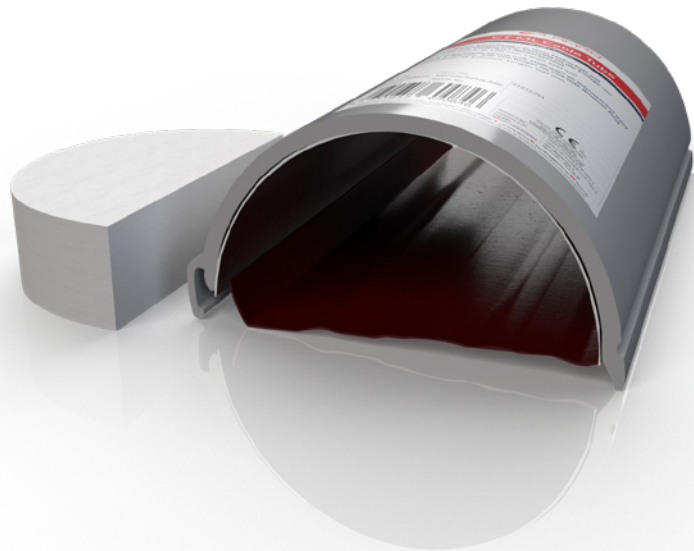

### Delivery and Packaging

CT ML		Stopper set
Packaging	box	
Lengths	200 mm	-
Diameter	120 mm	
Content	1 piece	20 pcs.
Item number		
	01272201	01272996

Please contact us for further information:


**T** +49 6746 9410-0 **E** [bestellungen@flamro.de](mailto:bestellungen@flamro.de)

**W** [flamro.de](http://flamro.de)

# System Cable Tube ML

## Technical Data

<b>Certificate of usability</b>	ETA-16/0016
<b>Coating</b>	grey, inner lining red
<b>Material</b>	<ul style="list-style-type: none"> <li>• PVC half shells</li> <li>• inner lining made of intumescent fabric</li> <li>• closure made of soft foam plugs</li> </ul>
<b>Storage</b>	Storage indoors at room temperature (+5 °C to +30 °C).
<b>Safety information</b>	No hazardous material according to German Hazardous Substances Act (GefStoffV) and no hazardous material according to German Act on the Transport of Dangerous Goods (GGVS/ADR).
<b>Declaration of performance (DOP) no.</b>	0127-CT_CT-ML-CABLE-TUBE

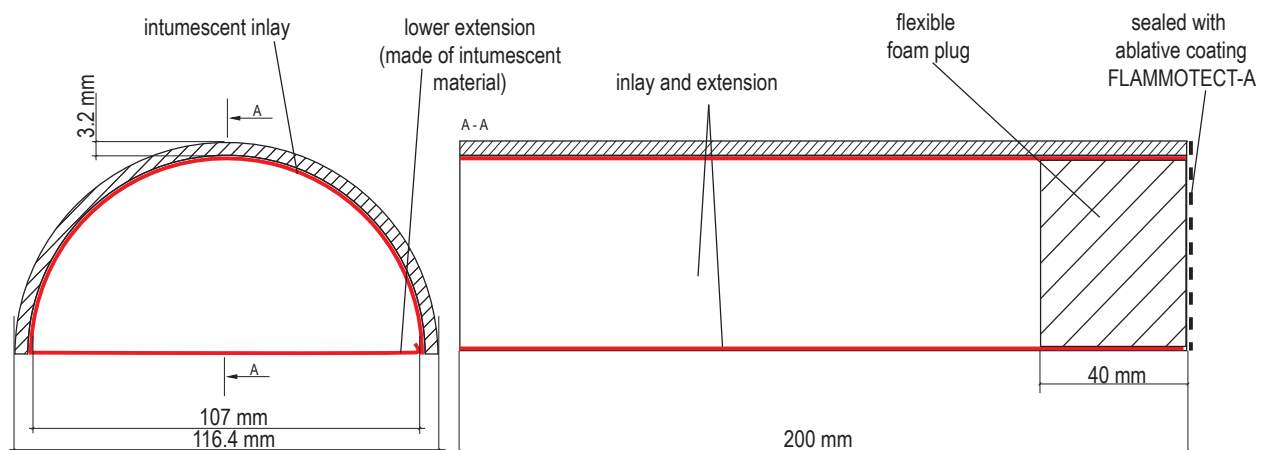

## Applications

### Penetration seal

	Certification	System name	Fire resistance class
<b>CE</b>	ETA-16/0016	System Cable Tube ML	max. EI 120 in acc. with EN 13501-2
<b>DIN</b>	ETA-16/0016 in comb. with Z-19.53-2482	NOVASIT COMBI 90	fire-resistant (90 min.)
	ETA-16/0016 in comb. with Z-19.53-2329	Flammotect COMBI 90	