



PYRO-SAFE® Flammotect single-layer

Mixed penetration seal made of mineral fibre board (1x 60 mm) with ablative fire protection coating.



Fire resistance class

max. EI 90 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

Allowed services

System data

Certificate of usability		ETA-14/0418
Thickness structural element	Wall	≥ 100
	Floor	≥ 125
Sealing thickness	Wall	≥ 60
	Floor	≥ 60
Maximum sealing size	Wall	1175 x 1200
	Floor	1200 x 2400 or 800 x ∞

All specifications in mm

Media lines		max. diameter*
	Cable	≤ 80
	Cable bundle	≤ 100 / ≤ 21
	Cable support structures	✓
	EIC Single	≤ 32 / ≤ 21
	EIC Bundle	≤ 100 / ≤ 32 / ≤ 21
	PE lines "speed pipes"	24x ≤ 7.0 7x ≤ 10.0 5x ≤ 12.0
	Combustible pipes	≤ 110
	Multilayer composite pipes	≤ 63
	Non-combustible pipes with mineral fibre insulation	≤ 219.1 (Steel) ≤ 88.9 (Copper)
	Non-combustible pipes with FEF insulation	≤ 170 (Steel) ≤ 108 (Copper)
	HVAC split-line-combinations	✓

*All specifications in mm

Please contact us for further information:

- ✉ Information: global@svt.de Orders: order@svt.de
- ☎ +49 4105-40 90-0



PYRO-SAFE® Flammotect single-layer

Products



PYRO-SAFE® FLAMMOTECT-A Fire protection coating

Coating

12,5 kg Pail - Art. no. 01155101
15 kg Pail - Art. no. 01155105

Solid emulsion

12,5 kg Pail - Art. no. 01155106
15 kg Pail - Art. no. 01155107


Filler

12,5 kg Pail - Art. no. 01155104
15 kg Pail - Art. no. 01155109
310 ml cartridge - Art. no. 01155125




“Klimarock” lamella mat

Roll of 3.05 m² - Art. no. 01187100



Mineral fibre board pre-coated on both sides with PYRO-SAFE® FLAMMOTECT-A


1000 x 600 x 60 mm – Art. no. 01182160



PYRO-SAFE® DG-CR BS

Fire protection wrap

Roll of 10 m x 100 mm - Art. no. 01264100



PYRO-SAFE® DG-CR 1.5

Fire protection wrap

Roll of 10 m x 125 mm - Art. no. 01261125





Mineral wool

Bag of 10 kg - Art. no. 01183000

Design variants

Coating with
PYRO-SAFE® FLAMMOTECT-A
(DFT ≥ 1.0 mm)

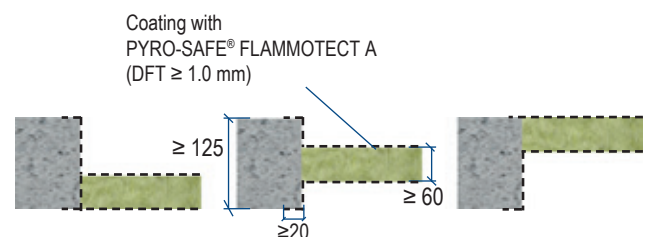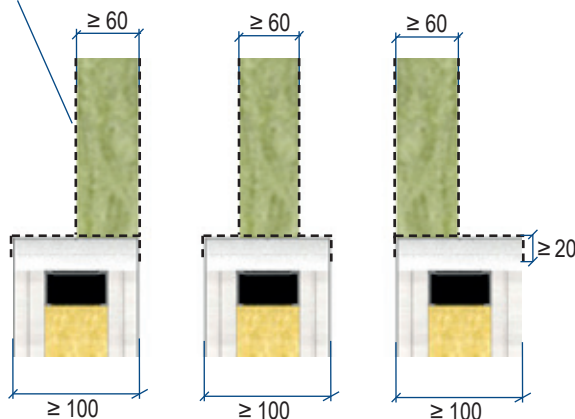

All specifications in mm

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. PYRO-SAFE® is a registered trademark © of the svt group, Seevetal.