



PYRO-SAFE® CT ML

Penetration sealing system for cables and electrical conduit penetrations in the system floor area.



Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application





- Plasterboard wall, solid wall

System data

Certificate of usability	ETA-16/0016	
Component thickness	Wall	≥ 100
Sealing thickness	Wall	≥ 200
Maximum sealing size	Wall	2000 x 150

All specifications in mm

Allowed services

Media lines			max. diameter*
	Cable		≤ 50
	Cable bundle		100 % / ≤ 21
	EIC	Single	≤ 32 / ≤ 21
	EIC	Bundle	100 % / ≤ 32 / ≤ 21

*All specifications in mm

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0



PYRO-SAFE® CT ML

Products



PYRO-SAFE® CT ML
Cable Tube
 Length 200 mm - Art. no. 01282200



PYRO-SAFE® NOVASIT K2
Fire protection mortar
 25 kg Bag - Art. no. 01163030



PYRO-SAFE® GFM
Fire protection mortar
 25 kg Bag - Art. no. 01167030



Mineral fibre board
pre-coated on one side with
PYRO-SAFE® FLAMMOTECT-A
 1000 x 600 x 50 mm – Art. no. 01181150



PYRO-SAFE® FLAMMOTECT-A
Fire protection coating
Coating
 12,5 kg Pail - Art. no. 01155101
 15 kg Pail - Art. no. 01155105

Solid emulsion
 12,5 kg Pail - Art. no. 01155106
 15 kg Pail - Art. no. 01155107

Filler
 12,5 kg Pail - Art. no. 01155104
 15 kg Pail - Art. no. 01155109




Mineral wool
 Bag of 10 kg - Art. no. 01183000

Design variants

	<p>Mortar bulkhead</p>		<p>Soft bulkhead</p>
--	-------------------------------	--	-----------------------------

Group arrangement

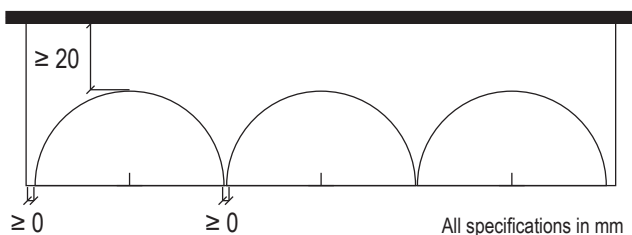

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. PYRO-SAFE® is a registered trademark © of the svt group, Seevetal.